


ARCHITECTURAL WIRE MESH

DIRECT METALS



We manufacture in accordance with NAAMM Standards

ISO 9001:2015 CERTIFIED

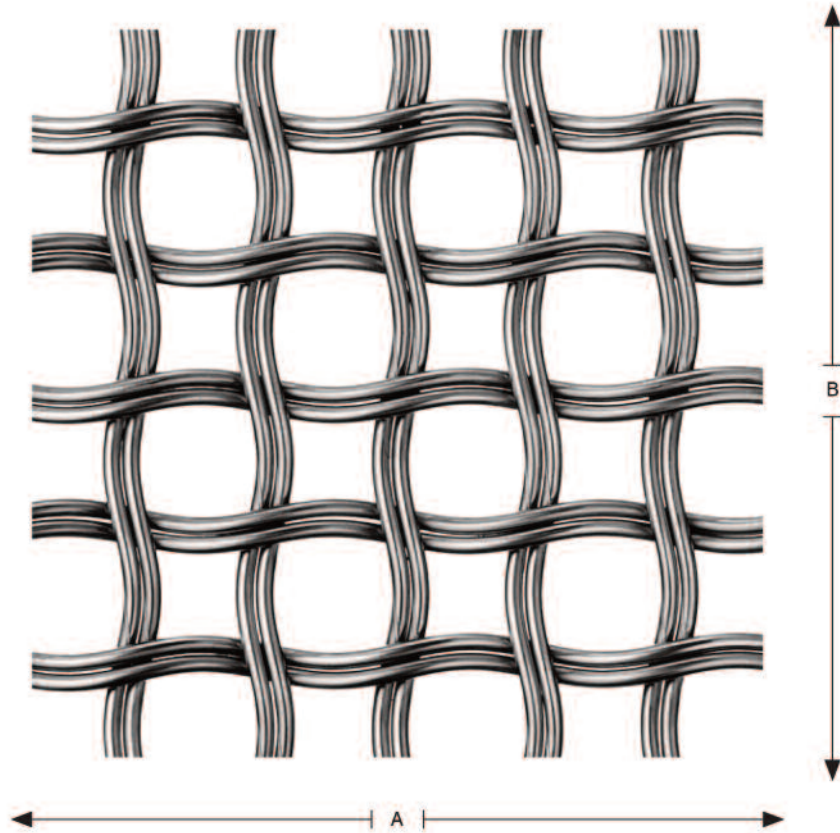

DMM22-80

| | |
|-----------------------------|--|
| MESH CATEGORY | Mid-Fill |
| % OPEN AREA | 52% |
| WEIGHT | 1.90 lbs/sq ft |
| CRIMP STYLE | 2H2H |
| MAXIMUM "A" DIMENSION | 240" |
| MAXIMUM "B" DIMENSION | 120" |
| OPENING LIMITATION** | 0.65" |
| OVERALL THICKNESS | 0.210" |
| ASPECT RATIO | 1.00 : 1 |
| AVAILABLE ALLOYS | Stainless, Mild Steel, Bronze, Brass, Copper, Pre-Galv |

**Maximum sphere diameter which will pass through opening
Product specifications are subject to change. Measurements and data are approximate and should be confirmed with a physical sample.