


BAR GRATING



We manufacture in accordance with NAAMM Standards

ISO 9001:2015 CERTIFIED

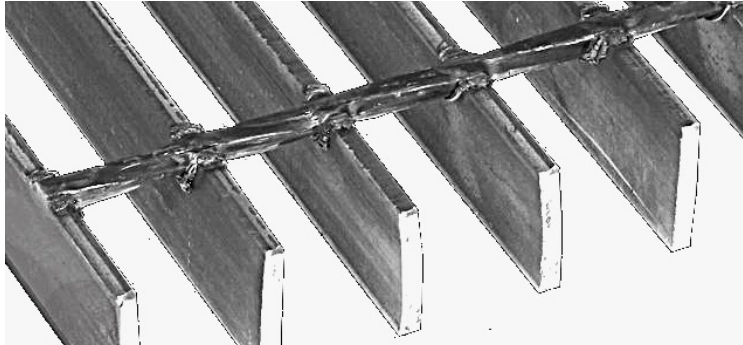

BAR GRATING - 1" x 3/16" Rectangular Bar, Smooth Surface - ADA

| | |
|--|---|
| Product Line | Bar Grating |
| Construction Type | Welded |
| Bearing Bar Shape | Rectangular Bar |
| Series Type & Name | CMW-4-100 - CLOSE MESH (11-W-4) - ADA |
| Product Spacing | 11-W-4 |
| Primary Material | Carbon Steel (CS) |
| Alloy, Grade or Type | Hot Rolled (HR) |
| Material Finish | Mill Finish |
| Bearing Bar Size & Shape | 1" Height x 3/16" Thick Rectangular Bar |
| Bearing Bar Height | 1" |
| Bearing Bar Thickness | 3/16" |
| Bearing Bar Spacing | 11/16" on Center |
| Clear Space Between Bearing Bars | 1/2" |
| Product Surface | Smooth |
| Bearing Bar Direction (Span) | Parallel to Length of Panel |
| Cross Bar Type | Twisted Rod |
| Cross Bar Spacing | 4" on Center |
| Percent Open Area | 68% |
| Weight | 12.16 Lbs./Square Foot |
| Product Form | Panel |
| Sizes (Width x Length) | 24" x 288"; 36" x 240" |

ADA Compliant - ADA Compliant product when direction of bearing bars (span) is installed perpendicular to dominant direction of travel.

Direct Metals® Company, LLC makes no representation or warranty (express or implied) regarding these drawings as they are conceptual in nature. It is the customer's responsibility to have all information and products verified to determine the suitability for the application. The customer assumes all risk and liability for any losses, claims or damage resulting from such use. Certain numbers may be rounded up or down for example purposes.