


BAR GRATING

DIRECT METALS®



We manufacture in accordance with NAAMM Standards

ISO 9001:2015 CERTIFIED

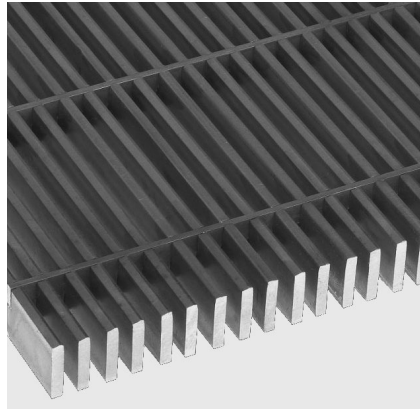

BAR GRATING - 1-1/2" x 3/16" Rectangular Bar, Smooth Surface - ADA

Product Line	Bar Grating
Construction Type	Press-Locked
Bearing Bar Shape	Rectangular Bar
Series Type & Name	GCM-I-150 - CLOSE MESH (7-P-4) - ADA
Product Spacing	7-P-4
Primary Material	Aluminum (AL)
Alloy, Grade or Type	Alloy 6063-T6 (6063T6)
Material Finish	Mill Finish
Bearing Bar Size & Shape	1-1/2" Height x 3/16" Thick Rectangular Bar
Bearing Bar Height	1-1/2"
Bearing Bar Thickness	3/16"
Bearing Bar Spacing	7/16" on Center
Clear Space Between Bearing Bars	1/4"
Product Surface	Smooth
Bearing Bar Direction (Span)	Parallel to Length of Panel
Cross Bar Type	Rectangular
Cross Bar Spacing	4" on Center
Percent Open Area	55%
Weight	9.30 Lbs./Square Foot
Product Form	Panel
Sizes (Width x Length)	36.063" x 144"

ADA Compliant - ADA Compliant product when direction of bearing bars (span) is installed perpendicular to dominant direction of travel.

Direct Metals® Company, LLC makes no representation or warranty (express or implied) regarding these drawings as they are conceptual in nature. It is the customer's responsibility to have all information and products verified to determine the suitability for the application. The customer assumes all risk and liability for any losses, claims or damage resulting from such use. Certain numbers may be rounded up or down for example purposes.